

TECHNICAL DATASHEET

Part Numbers and Product Order Codes:-


Part Number	-	-	-	-	-	EV-MCP RESET
Description	-	-	-	-	-	Analogue Evolution Type A Indoor Manual Call Point
Computer Reference Number	-	-	-	-	-	F16N82003 – Surface Mount F16N82008 – Flush Mount

Technical Specifications:-

Operation Method	-	-	-	-	-	Non Frangible, Resettable
Operating Element	-	-	-	-	-	Microswitch
Operating Voltage	-	-	-	-	-	20V d.c. to 35V d.c.
System Voltage	-	-	-	-	-	35V d.c.
Quiescent Current	-	-	-	-	-	200µA
Alarm Current	-	-	-	-	-	2mA (LED ON)
Operating Temperature	-	-	-	-	-	- 10°C to + 55°C
Storage Temperature	-	-	-	-	-	- 25°C to + 70°C
Charging Time	-	-	-	-	-	1 minutes
Relative Humidity-	-	-	-	-	-	≤ RH95% non-condensing.
I.P. Protection Rating	-	-	-	-	-	IP24
Addressing Method	-	-	-	-	-	8 Way DIL switch.
Material	-	-	-	-	-	POM / Polycarbonate
Dimensions	-	-	-	-	-	87mm x 87mm x 23mm
Mass	-	-	-	-	-	115gms
Connections	-	-	-	-	-	Flying Leads
EMC Conformance	-	-	-	-	-	EMC conformance to BSEN50130-4
CE Conformity	-	-	-	-	-	EN54-11:2001/A1:2005
CPD Number	-	-	-	-	-	0845-CPD-232.1690
DoP Number	-	-	-	-	-	1690

All wiring must conform to the current edition of IEE Wiring regulations and BS5839 Part 1
All loop Cable Screens shall be connected together, but must be Isolated from Ground. Cable Screens shall be connected to Earth Ground within the Control Panel ONLY.

Dimensions

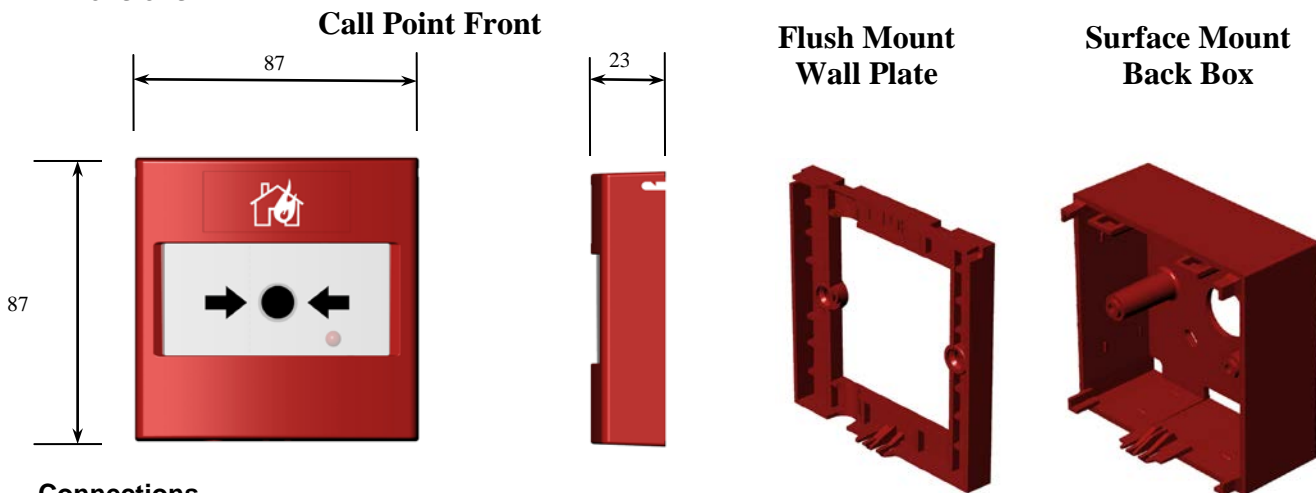

Connections

