

## TECHNICAL DATASHEET

### Part Numbers and Product Order Codes:-

Part Number	-	-	-	-	-	EV-MCP RESET WP
Description	-	-	-	-	-	Analogue Addressable Type A Outdoor Manual Call Point
Computer Reference Number	-	-	-	-	-	F16N82004

### Technical Specifications:-


Operation Method	-	-	-	-	-	Non Frangible, Resettable
Operating Element	-	-	-	-	-	Microswitch
Operating Voltage	-	-	-	-	-	20V d.c. to 35V d.c.
System Voltage	-	-	-	-	-	35V d.c.
Quiescent Current	-	-	-	-	-	200µA
Alarm Current	-	-	-	-	-	2mA (LED ON)

Operating Temperature	-	-	-	-	-	- 25°C to + 70°C
Storage Temperature	-	-	-	-	-	- 25°C to + 70°C
Charging Time	-	-	-	-	-	1 minute
Relative Humidity	-	-	-	-	-	≤ RH95% non-condensing.
I.P. Protection Rating	-	-	-	-	-	IP67
Addressing Method	-	-	-	-	-	8 Way DIL switch.
Material	-	-	-	-	-	POM / Polycarbonate
Dimensions	-	-	-	-	-	119mm x 119mm x 62mm
Mass	-	-	-	-	-	324gms
Connections	-	-	-	-	-	Terminal Block

EMC Conformance	-	-	-	-	-	EMC conformance to BSEN50130-4
CE Conformity	-	-	-	-	-	EN54-11:2001/A1:2005
CPD Number	-	-	-	-	-	0845-CPD-232.1690
DoP Number	-	-	-	-	-	1690

All wiring must conform to the current edition of IEE Wiring regulations and BS5839 Part 1  
All loop Cable Screens shall be connected together, but must be Isolated from Ground. Cable Screens shall be connected to Earth Ground within the Control Panel ONLY.

### Dimensions

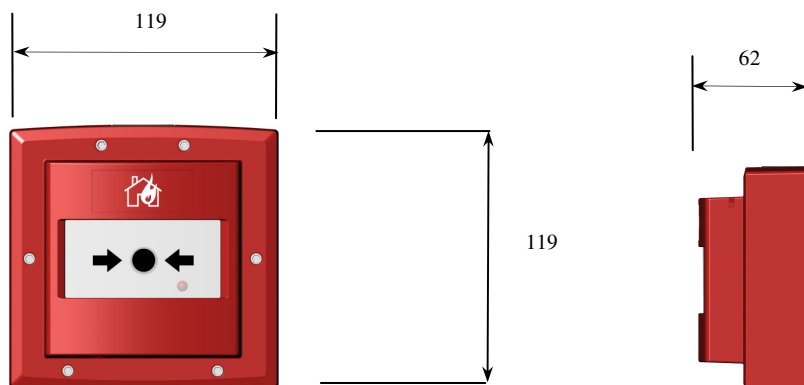

### Connections

