


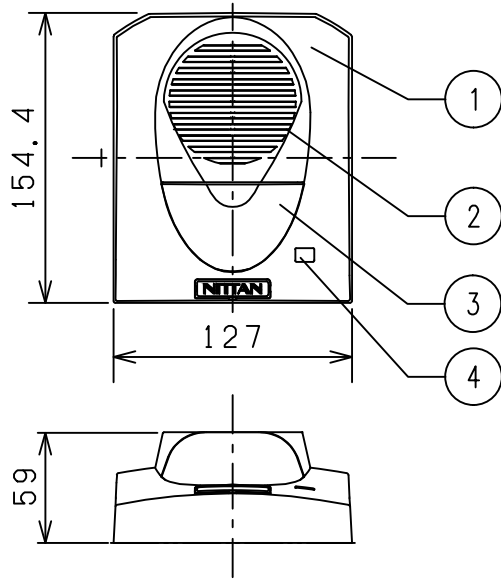


Horn / Strobe

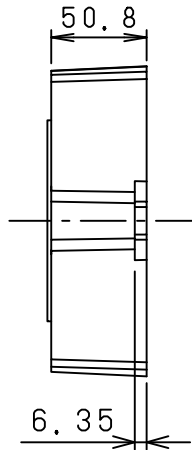

Outdoor Back Box

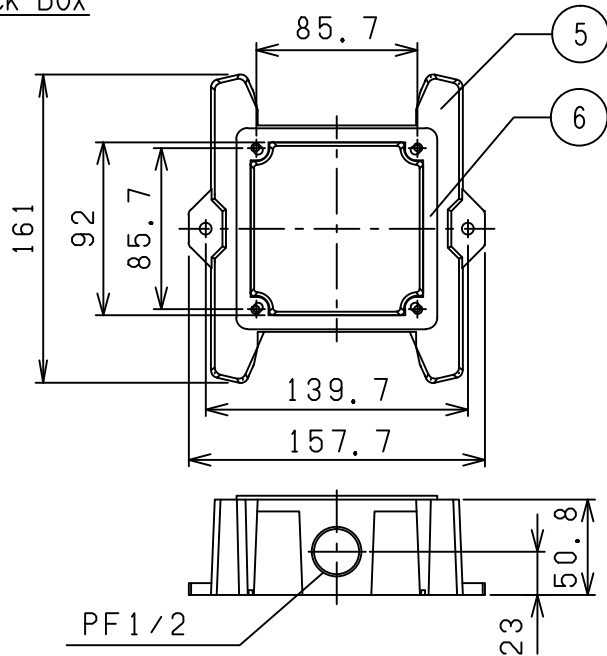

Index

No.	Description	Remarks	Q'ty
1.	Jacket	ABS, Red	1
2.	Sound Outlet		1
3.	Clear Lens		1
4.	Light Intensity Selector		1
5.	Outdoor Back Box	Aluminum Die Casting, Red	1
	(Model EVCA-AP-BBX-5)		
6.	Gasket	CP	1

Specifications

Voltage	:	Regulated 12V DC/FWR
	:	Regulated 24V DC/FWR
Operating Voltage Range	:	8-17.5V (12V DC/FWR)
	:	16-33V (24V DC/FWR)
Sound Output	Horn :	74dBA min. at 10ft per UL
	Chime :	55dBA min. at 10ft per UL
Luminous Intensity (Selectable)		
	at 12V :	15,35,60(15/75)cd
	at 24V :	15,35,60(15/75),75,95,110cd
Max. Operating Current		12V - Strobe -24V (Variable)
	DC :	171mA rms, 225mA rms
	FWR :	202mA rms, 284mA rms
	12V - Horn -24V (Variable)	
	DC :	153mA rms, 92mA rms
	FWR :	230mA rms, 302mA rms
Flash Rate	:	1 Hz
Environment	:	Outdoor
IP Rate	:	IP35 (with EVCA-AP-BBX-5)
Operating Temperature	:	-40c to +66c
Applicable Standard	:	UL464, UL1638

NITAN COMPANY, LIMITED	
SCALE	1 / 4 DATE Dec. 01, 2016
MODEL NO.	EVCA-AP-SHWP
TITLE	Wall Mount Weather Proof Horn/Strobe
DRAWING NO.	N0300009 Dim: mm