


Index

No.	Description	Remarks	Q'ty
1.	Plate	ABS, Red	1
2.	Bush	ABS, Red	4
3.	PCB Board Assy		1
4.	Terminal Screws		10

Specifications

Voltage	:	Regulated 24V DC/FWR
Operating Voltage Range	:	16 - 33V DC/FWR
Max. Load on Loop	:	3A Average (Max. 5A Peak)
Max. RMS Operating Current	:	
		Regulated 24V DC : 34mA
		Regulated 24V FWR : 68mA
Environment	:	Indoor
Operating Temperature	:	0°C to 49°C
Applicable Standard	:	UL1971

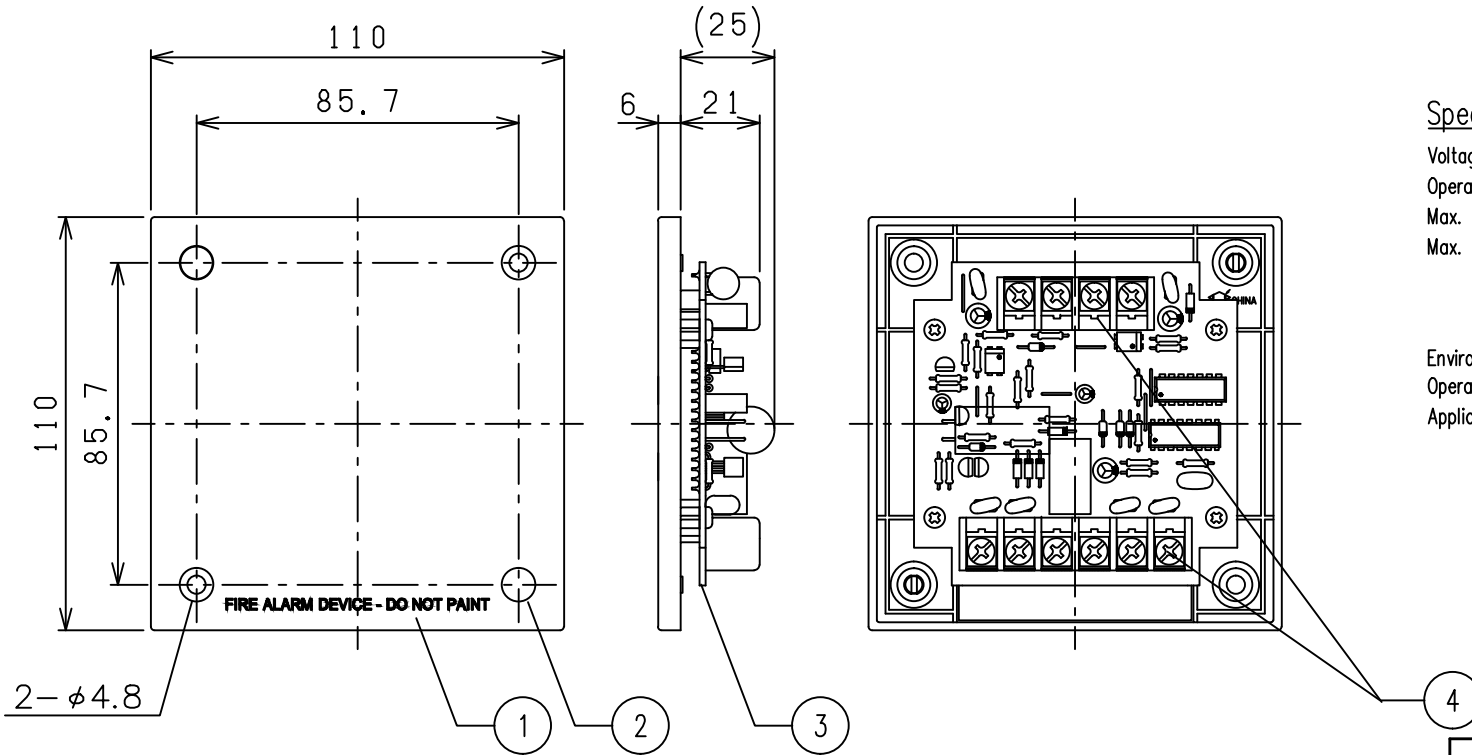

NITAN COMPANY, LIMITED	
SCALE	1 / 2 DATE Dec. 01, 2016
MODEL NO.	EVCA-AP-SMD10
TITLE	
Synchronization Module for Horn / Strobe	
DRAWING NO.	N0300011 Dim: mm